


CUTA3320321B

REV	DATE	BY	DESCRIPTION
A	10-06-16	MC	INITIAL RELEASE
B	04-01-21	MC	UPDATED DESIGN. CLARIFIED NOTE 1.

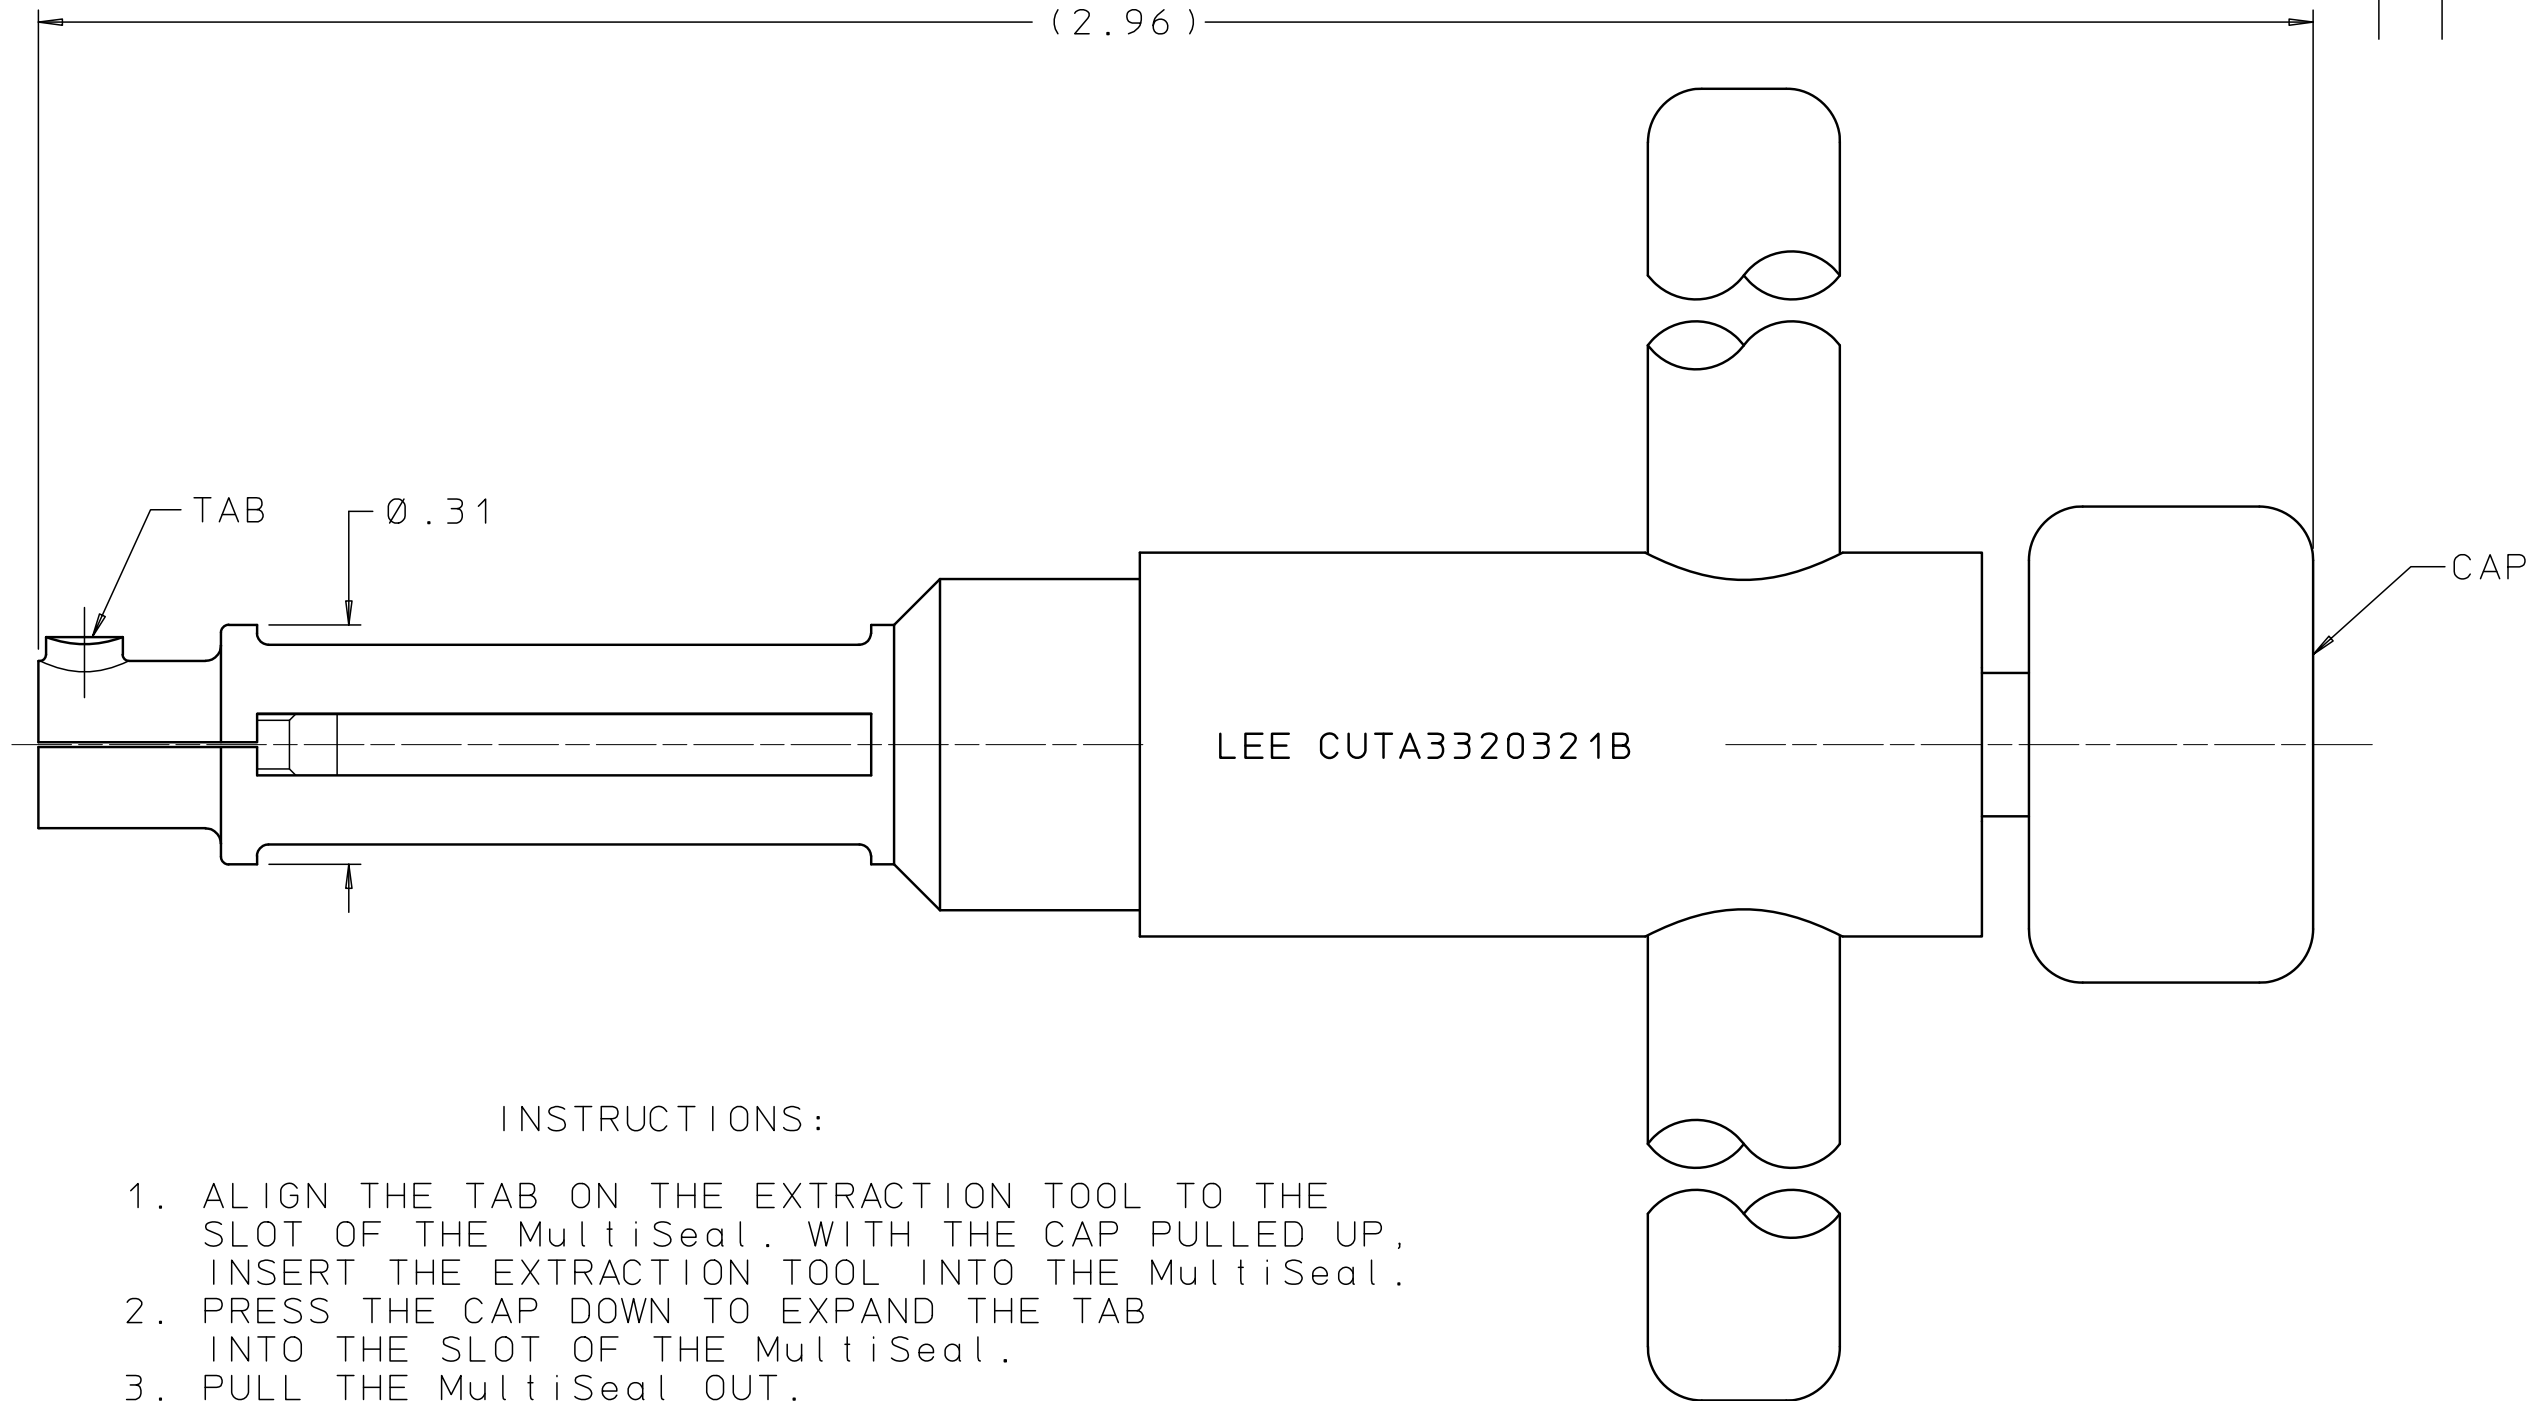

INSTRUCTIONS:

1. ALIGN THE TAB ON THE EXTRACTION TOOL TO THE SLOT OF THE MultiSeal. WITH THE CAP PULLED UP, INSERT THE EXTRACTION TOOL INTO THE MultiSeal.
2. PRESS THE CAP DOWN TO EXPAND THE TAB INTO THE SLOT OF THE MultiSeal.
3. PULL THE MultiSeal OUT.
4. PULL THE CAP UP TO RELEASE THE MultiSeal.

PROPRIETARY NOTICE

This document contains confidential, trade secret information which is proprietary to The Lee Company, and is submitted upon the express condition that neither it, nor our products, will be used directly or indirectly in any way detrimental to the interests of The Lee Company, such as disclosure to others or replication of our products, and/or in violation of 18 U.S.C. 1905 (TSA), 5 U.S.C. 552 (FOIA), E.O.12600 of 6/23/87, 18 U.S.C. 1832, and C.G.S.A. (CT) Chapter 625 sec. 35-50 thru 35-58.

CUTD0407750
REFERENCE

DWG NO: CUTA3320321B	NOTES AND DIMENSIONS SHOWN HERE ON ARE FOR INSPECTION IDENTIFICATION ONLY. ALL MANUFACTURING RIGHTS RESERVED.		DRAWN BY: M C	10-06-16	LEE MultiSeal EXTRACTION TOOL	
	EXTERNAL CORNER RAD: INTERNAL FILLET RAD:		CHK'D BY: TGC	10-06-16	THE LEE COMPANY WESTBROOK, CT 06498	
	SURFACE FINISH ✓ ALL OVER DIMENSIONS ARE IN INCHES		APP'D BY: B B	10-07-16		
	TOLERANCES 2 PLACES ±.015 3 PLACES ±.005 ANGLES ±5°		MAT:	H.T.:	FINISH:	SIZE: B
			DWG NO. CUTA3320321B		REV: B	DWG SCALE: NONE
			SHEET 1 OF 1			