
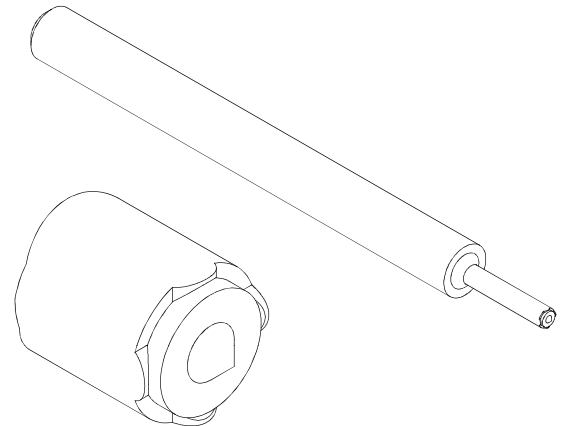



Revision Info.	
Rev	Change Description
A	Released

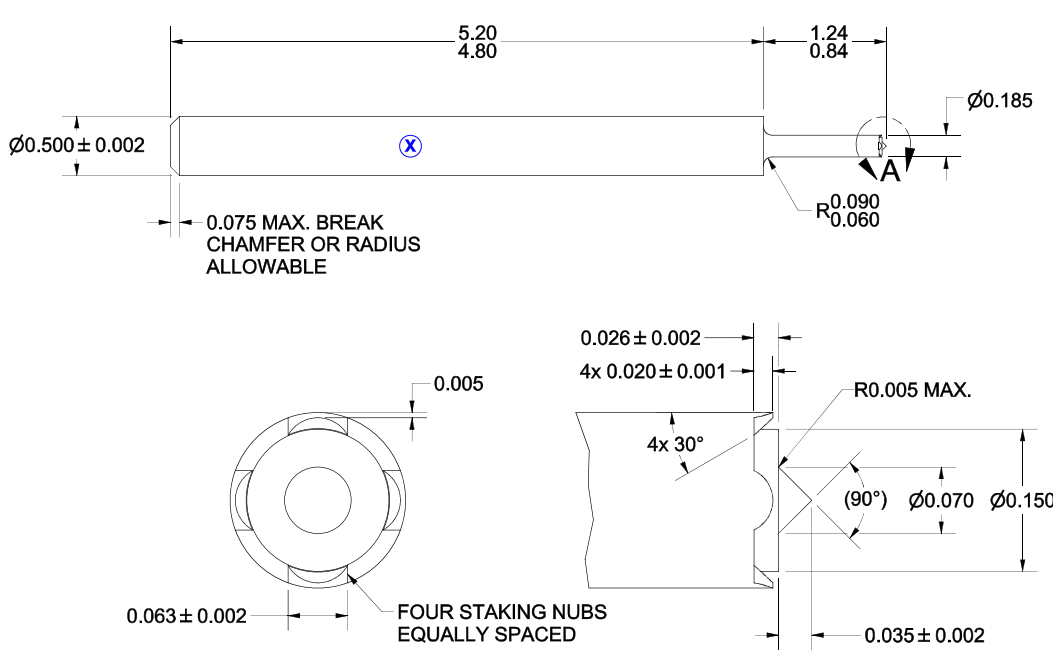

- NOTES:**
- INSTALLATION TOOL HEAT TREAT: SOAK FOR 20 MINUTES AT 1700°F-1750°F. AIR COOL THEN TEMPER FOR ONE HOUR BETWEEN 375°F AND 400°F TO ATTAIN Rc 56-58.
 - INSTALLATION TOOL USED FOR INSTALLING THE 5MM LEE BETAPLUG 6000 SERIES - PART NUMBER PLBA0502604S SHORT SERIES - PART NUMBER PLBA0502610S
 - MARK WITH PART NUMBER AND REVISION LETTER PER TITLEBLOCK. (X)

DETAIL A
SCALE 8 : 1

THIRD ANGLE PROJECTION	UNLESS OTHERWISE SPECIFIED EXTERNAL RADI R INTERNAL FILLET R SURFACE FINISH MAXIMUM	Author Vernon, Jon Engineer J. Craig Origination Date 6/14/2013 Modification Date 7/8/2016	 The Lee Company Industrial Microhydraulics Group Technical Center Westbrook, CT 06498 / U.S.A.	
CODE IDENT NO. NUMBER OS730	CRITICAL CHARACTERISTICS	MATL S-7	TITLE: LEE BETAPLUG, INSTALLATION/STAKING TOOL, 5mm BETAPLUG	
Sheet Size B	PROPRIETARY ITEM This document contains proprietary information and is submitted upon the express condition that the information contained herein will not be used directly in any way detrimental to the interests of The Lee Company and/or in violation of regulation DAR 7-104.9 (d)(1 July 1974), et seq.	H.T. <1	FINISH DIMENSIONS ARE IN INCHES TOLERANCES 2PL 3PL 4PL ANG ±.01 ±.003 ±.0010 ±2*	DO NOT SCALE DRAWING
			-FMF / Used On- Lee Betaplug Product	PART # PLBT0570031S REV. State Released SHEET 1 of 1 SCALE: 1:1