



2.5 mm 316L PRESS-IN CHECK VALVE WITH CERAMIC BALL

The new 2.5 mm 316L Press-In Check Valve With Ceramic Ball is a miniature cartridge-style check valve specifically designed for installation into plastics. This new valve is constructed from medical grade 316L stainless steel and features a ceramic ball for improved compatibility with hydrogen and other aggressive fluids.

The valve's unique press-in design enables easy installation, ensures retention, and prevents any bypass leakage. Its high quality metal seat provides low leakage and highly repeatable cracking pressures. Thanks to its robust design and 100% performance testing, this valve offers consistent long-term performance.

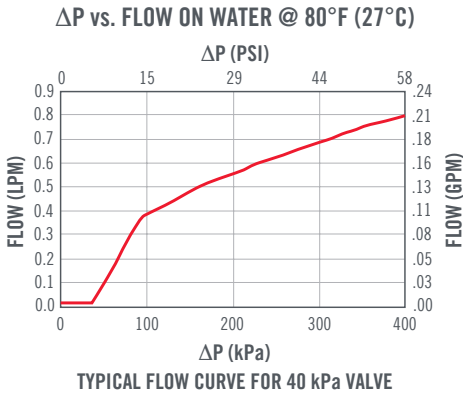




- 316L stainless steel and ceramic materials for improved compatibility with hydrogen and other aggressive fluids
- 100% performance tested to eliminate rework
- Simple, bidirectional press-in installation provides design flexibility with forward and reverse flow capabilities

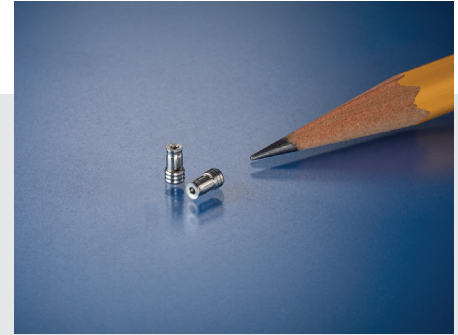

ACTUAL SIZE



(As Installed)

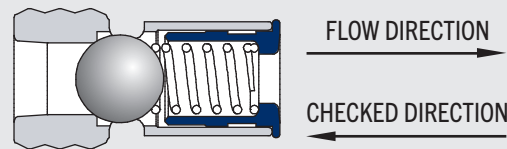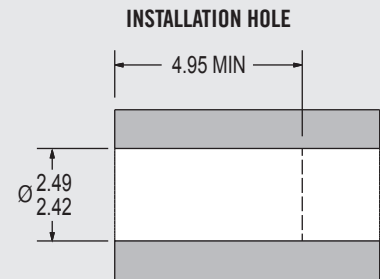

All dimensions are in millimeters.

PART NUMBER	CRACKING PRESSURE
CCPI2540000S	0 kPa (No Spring)
CCPI2540004S	4 ± 3 kPa (0.6 ± 0.4 psid)
CCPI2540007S	7 ± 5 kPa (1 ± 0.7 psid)
CCPI2540014S	14 ± 5 kPa (2 ± 0.7 psid)
CCPI2540040S	40 ± 15 kPa (6 ± 2.2 psid)
CCPI2540069S	69 ± 15 kPa (10 ± 2.2 psid)

PERFORMANCE	
Lohm Rate	750 Lohms*
Checked Direction Leakage	10 SCCM (Max.) At 500 kPa (72.5 psid) On Air
Maximum Working Pressure	The valve's maximum working pressure is dependent on housing material, configuration, and operating conditions.
Materials	Body, Stop, and Spring are 316L Stainless Steel Ball is Ceramic

* The Lohm is a measure of flow resistance. Additional information can be found on the reverse side and at theleeco.com/Lohm.



2 Pettipaug Road, PO Box 424, Westbrook, CT 06498
Tel: 860-399-6281 • theleeco.com

PDS 208 10/23
© 2023 The Lee Company



2.5 mm 316L PRESS-IN CHECK VALVE WITH CERAMIC BALL


INSTALLATION

To install, simply press the valve into a plastic installation hole until the valve is, at a minimum, flush with the top of the installation hole.

The valve can be installed in either direction, providing forward or reverse flow capabilities. Lee installation tools for each flow orientation are available. Please visit our website or contact your local Lee Sales Engineer to see installation procedures "IP 2.5 mm Press-In F" and "IP 2.5 mm Press-In R" for more information.

These valves can be pressed directly into plastics that have sufficient elongation such as nylon, polyethylene, polypropylene, acetal, and PEEK.

For installation into other plastics, contact your Lee Sales Engineer for more information. 2.5 mm 316L press-in valves are not designed to be installed into metal.

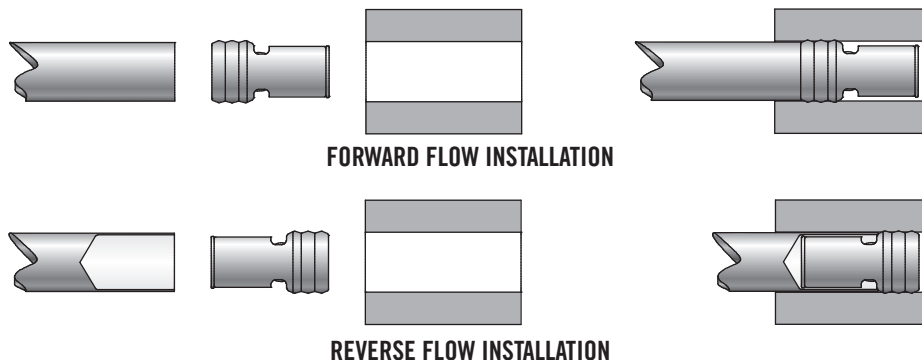

LEE LOHM LAWS (LIQUIDS)

WORKING WITH LIQUIDS

Engineers will be interested in our simple method of defining and measuring the resistance to fluid flow for hydraulic components. Just as the Ohm is used in electrical engineering, we find that we can use a liquid Ohm or "Lohm" to good advantage on all hydraulic computations.

When using the Lohm, you can forget about coefficients of discharge and dimensional tolerances on drilled holes. These factors are automatically compensated for in the Lohm calculations and confirmed by our testing of each component to establish flow tolerances. The resistance to flow of any fluid component can be expressed in Lohms.

The Lohm has been selected so that a 1 Lohm restriction will permit a flow of 100 gallons per minute of water with a pressure drop of 25 psi at a temperature of 80°F.

Due to the differences in fluid properties between gases and liquids, the equations for calculating the relationship between flow restriction, pressure differential, and flow rate are different.

LIQUID FLOW FORMULA

The following formulas are presented to extend the use of the Lohm laws to many different liquids, operating over a wide range of pressure conditions.

These formulas introduce compensation factors for liquid density and viscosity. They are applicable to any liquid of known properties, with minimum restrictions on pressure levels or temperature.

The units constant (K) eliminates the need to convert pressure and flow parameters to special units.

$$\text{Volumetric Flow Units } L = \frac{KV}{I} \sqrt{\frac{H}{S}} \quad \text{Gravimetric Flow Units } L = \frac{KV}{w} \sqrt{HS}$$

For more information on Lohms, contact your local Lee Sales Engineer or visit theleeco.com/Lohm.

NOMENCLATURE

- L = Lohms
- S = Specific gravity*
- H = Differential pressure
- V = Viscosity compensation factor**
- I = Liquid flow rate: volumetric
- w = Liquid flow rate: gravimetric
- K = Units constant – liquid (see chart below)
- *S = 1.0 for water at 80°F.
- **V = 1.0 for water at 80°F.

LIQUID FLOW – UNITS CONSTANT "K"

VOLUMETRIC FLOW UNITS			
FLOW UNITS	PRESSURE UNITS		
	psi	bar	kPa
GPM	20	76.2	7.62
l/min	75.7	288	28.8
ml/min	75,700	288,000	28,800
in ³ /min	4620	17,600	1760

GRAVIMETRIC FLOW UNITS			
FLOW UNITS	PRESSURE UNITS		
	psi	bar	kPa
PPH	10,000	38,100	3810
g/min	75,700	288,000	28,800

